


(anotated sheet)

RED = Right or Video = Yellow
WHITE = Left or Audio = Blue



DIN / Interfaced cbt

RadioShack
6-Ft. (1.82m) • Shielded
Audio and Digital-Camera Cable
Also for connecting audio components • 1/8" mono miniplug to RCA phono plug
42-2444A

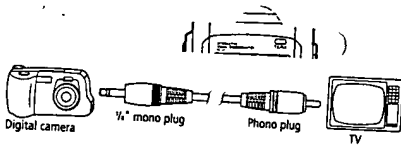


Custom Manufactured in China for RadioShack
A Division of Tandy Corporation, Fort Worth, TX 76102
Product may vary from depiction

JACKS



2



DATA port

5



Video input jack

1


TX out! RX in!

GET ACQUAINTED

CONNECTOR DESCRIPTIONS

WEBCAM (to)
COMPUTER (to)


- ① Video input jack
This jack accepts a 3.5 mm (1/8") diameter, 3-conductor plug. You may connect a digital camera or 8 mm VTR to take in images (acceptable video signals: 75 Ω , 1 V_{P-P} (140 IRE) \pm 15%, NTSC).



When connecting a device other than the provided camera unit, using this conductor could cause the device to be damaged.

- ② COM jack (CONTROL VCR Functions) S.I.T.
Connect a personal computer in which a dedicated program has been installed. For details, contact your authorized KENWOOD dealer, customer service, or service center. See P. 17

- ③ Video output jack (MY TRANSMITTER?)
Connect an external monitor, if you prefer. This jack accepts a 2.5 mm (1/10") diameter, 2-conductor plug.




#24-444 RCA
1/2" ADAPTER
#274-327

- ④ DC IN jack
Connect the provided or optional AC adapter to use power supplied from an AC outlet.

- ⑤ DATA port
Connect your transceiver. See page 5.

(anotated sheet)

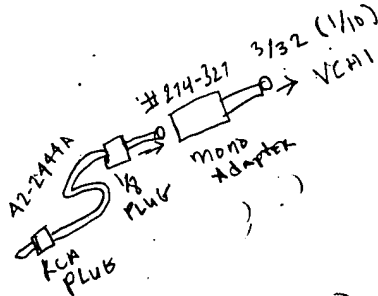


GETTING ACQUAINTED

ORIENTATION


1 Thru 5 for ME

CONNECTOR DESCRIPTIONS

WEBCAM (to) COMPUTER (to)

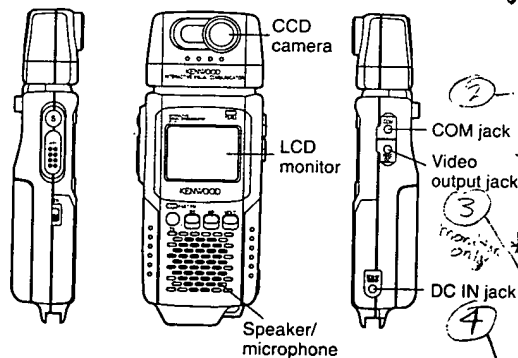


- ① Video input jack
* This jack accepts a 3.5 mm (1/8") diameter, 3-conductor plug. You may connect a digital camera or 8 mm VTR to take in images (acceptable video signals: 75 Ω , 1 V_{p-p} (140 IRE) \pm 15%, NTSC).



When connecting a device other than the provided camera unit, using this conductor could cause the device to be damaged.

- ② COM jack (Control VCHI Functions; S.I.T.)
Connect a personal computer in which a dedicated program has been installed. For details, contact your authorized KENWOOD dealer, customer service, or service center. See P. 17

- ③ Video output jack (My TRANSMITTER?)
Connect an external monitor, if you prefer. This jack accepts a 2.5 mm (1/10") diameter, 2-conductor plug.





#24-444 RCA
3/32" ADAPTER
#274-327

- ④ DC IN jack
Connect the provided or optional AC adapter to use power supplied from an AC outlet.

- ⑤ DATA port
Connect your transceiver. See page 5.

JACKS



2

TX out RX in


(ANOTATED SHEET)

2-8-2004

K-Word
VCH1
Robot
36
(3c sec)

VEDIO "DANCE HITS" AM STEREO
The Amazing AM-TV STEREO
The Radio Vision Electronic Network/Viewing System
PPA# 60/463103

The RAVEN/VS (AM STEREO - AM Picture) *tested*

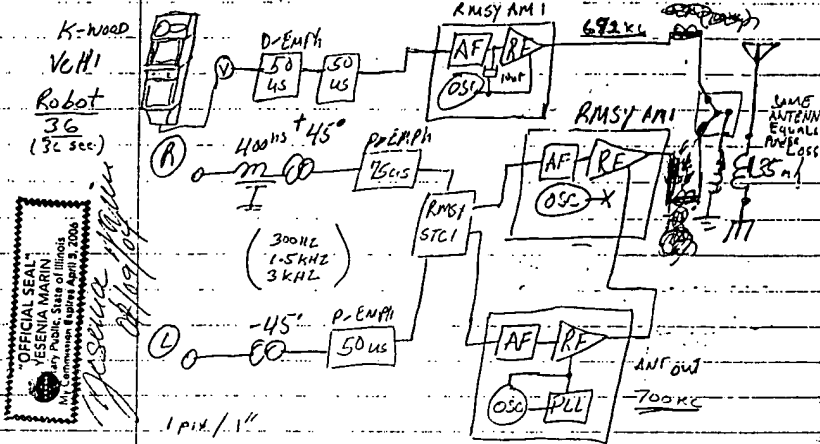

OFFICIAL SEAL
YESENIA MARTIN
My Commission Expires April 3, 2005

My source page
4/1/04

The RAVEN/VS (AM STEREO - FM Picture) *tested*

